


SFC Tracker Configuration

1) Disconnect from the Wi-Fi and find the Wise Device over Wi-Fi settings.



2) Once connected go to web address "192.168.1.1/config".

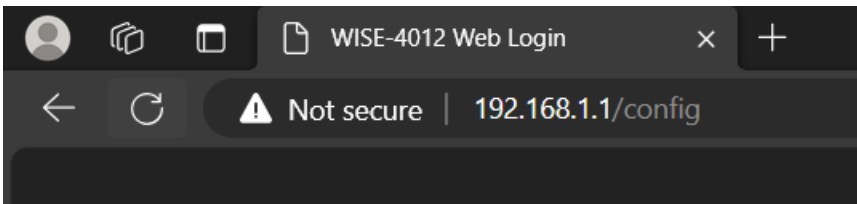


3) When prompted to login use

Account: admin


Password: 00000000



4) On the Wise page click on the configuration tab.

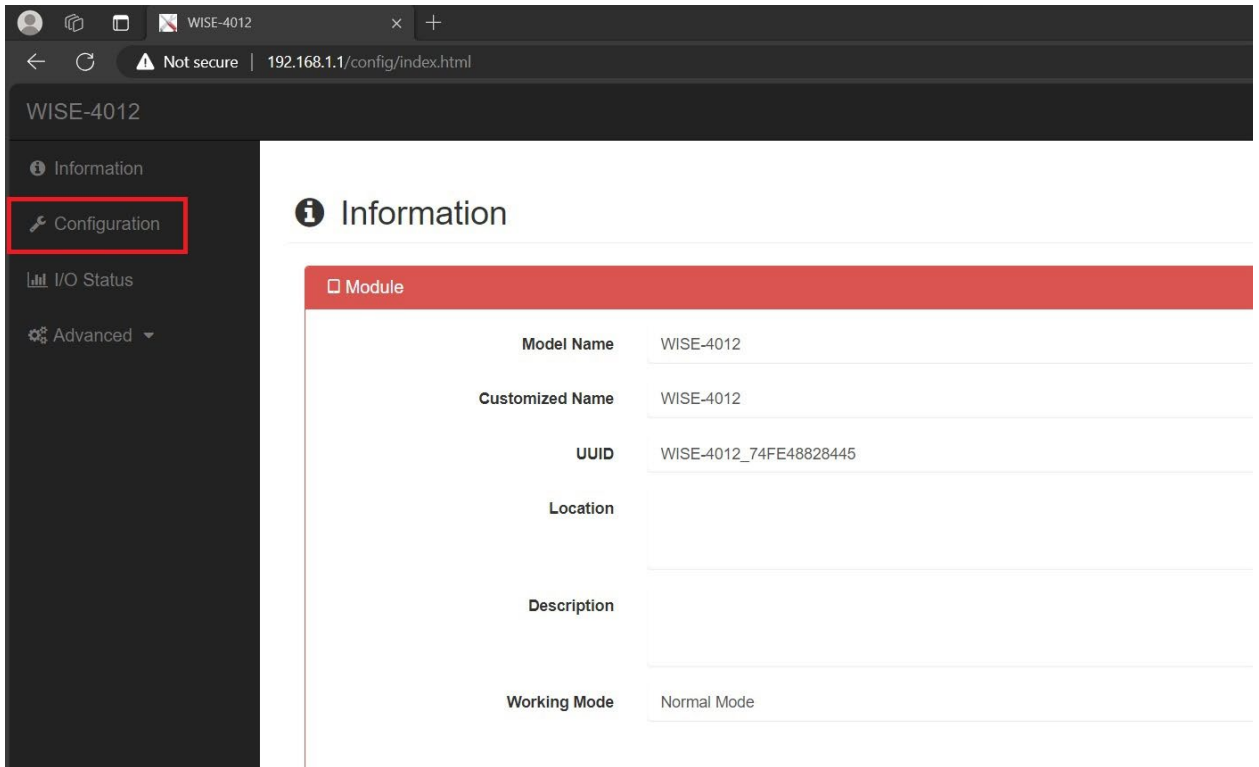

5) Open the wireless tab on the configuration page.

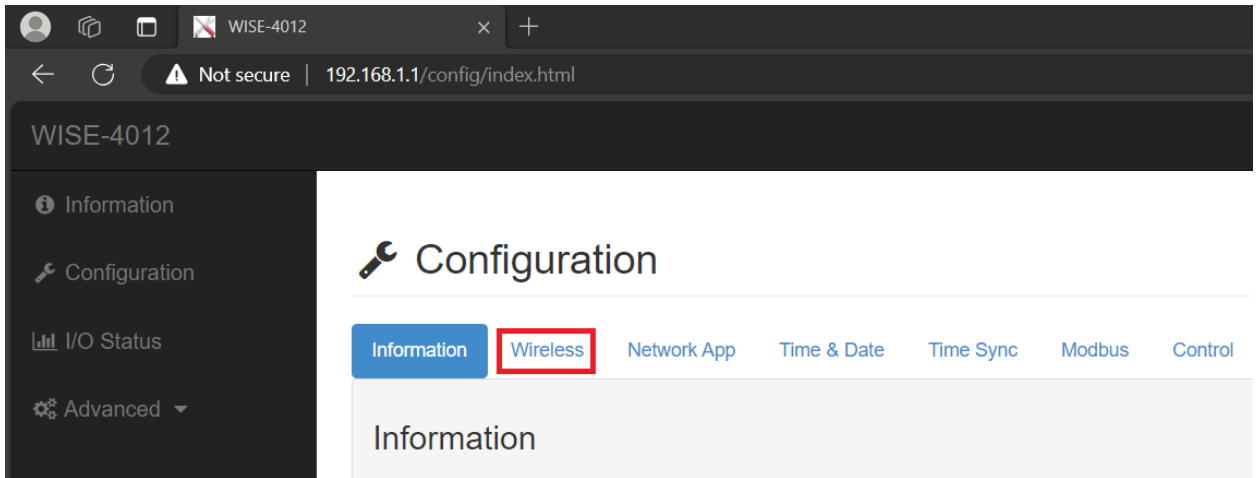

- 6) Change WLAN Mode to Infrastructure Mode. Fill out the SSID of the Access Point, the Security Type, and, if applicable, the Security Key.

The screenshot shows the 'WLAN Settings' configuration page. At the top, 'WLAN Mode' is set to 'Infrastructure Mode'. Below this, there are two sections: 'First AP Settings' and 'Secondary AP Settings (Optional)'. In the 'First AP Settings' section, the 'SSID of the Access Point' field is empty, 'Security Type' is set to 'Security WPA/WPA2', and the 'Security Key' field is empty. In the 'Secondary AP Settings (Optional)' section, the 'SSID of the Access Point' field is empty and 'Security Type' is set to 'Security Open'.

- 7) Below is the Infrastructure Mode IP Settings that will need to be filled out.

The screenshot shows the 'Infrastructure Mode IP Settings' configuration page. It contains several input fields: 'Mac' is pre-filled with '74-FE-48-82-84-45'; 'IP' is '192.168.1.1'; 'Subnet Mask' is '255.0.0.0'; and 'Gateway' is '192.0.0.0'. The 'IP Mode' section has 'Static' selected with a radio button, and 'DHCP' is unselected. A green 'Submit' button is located in the bottom right corner.

- 8) Once finished filling out these boxes click the green submit button in the lower right corner (pictured above) and connect back to the internet.